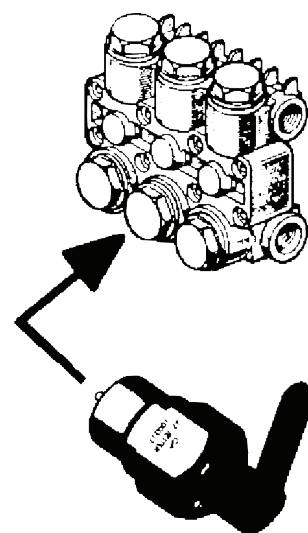


**FEATURES**

- Allows standard triplex pump to generate flow pulsations on demand to improve nozzle movement and cleaning power in sewer cleaning applications.
- Simple operation allows both full-flow and pulsation modes.
- Large easy-to-grasp handle allows gloved operation.
- Designed and Mad in the USA.
- Easy installation - simply replace middle valve cap and valve on any TT, EZ, 47, TX63 or ET Series pump.

**SPECIFICATIONS**

PART NUMBER	PUMPS	MAXIMUM PRESSURE	DIMENSIONS	WEIGHT	MATERIALS
100315	TT Series	3,500 PSI	1.25" Hex;	.5 lb.	Brass, Buna-N, Teflon, Stainless Steel
100316	EZ Series		1.5" from center to handle edge;		
	TX 63 Series				
100317	47 Series (Coarse Thread)		2.5" from manifold to valve top		
100072	47 Series (Fine Thread)				
101065	ET Series				

*Note: this valve reduces pump flow by 1/3 when engaged;  
prolonged use can result in a run-dry condition that will  
decrease plunger seal life.*



General Pump  
is a member of  
the Interpump Group

Ref 300069 Rev. D  
06-16

**GENERAL PUMP** 1174 Northland Drive • Mendota Heights, MN 55120  
Phone: 651.686.2199 • Fax: 800.535.1745 • e-mail: sales@gpcompanies.com • www.generalpump.com

